



VAT Vakuumventile AG  
CH-9469 Haag, Schweiz

## Product data sheet

**HV gate valve, Series 091, DN 50 (2")**  
**Ordering No. 09134-CE01**


### Description

Flange	CF-F 50
Actuator	Manual actuator with detachable handle, self locking in any position, visual position indicator
Number of turns needed for full stroke	approx. 22 Turns
Feedthrough	Bellows feedthrough

### Technical data

Leak rate	
– Valve body	$< 1 \cdot 10^{-9} \text{ mbar ls}^{-1}$
– Valve seat	$< 1 \cdot 10^{-7} \text{ mbar ls}^{-1}$
Pressure range	$1 \cdot 10^{-8} \text{ mbar}$ to 1.2 bar (abs)
Differential pressure on the gate	$\leq 1.2 \text{ bar}$
Conductance (molecular flow)	$250 \text{ ls}^{-1}$

Max. differential pressure at opening in closing and opening direction with influence to the cycle life

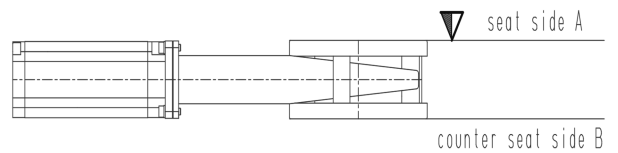

– Higher pressure on seat side A, the differential pressure acts in opening direction	$\leq 1.0 \text{ bar}$ with full cycle life
– Higher pressure on counter seat side B, the differential pressure acts in closing direction	$\leq 30 \text{ mbar}$ with full cycle life
– Higher pressure on counter seat side B, the differential pressure acts in closing direction	$\leq 1.0 \text{ bar}$ with reduced cycle life
Cycles until first service	5 000 (unheated and under clean conditions)
Bellows cycles	100 000 (unheated and under clean conditions)
Bake-out temperature	
– Valve body	$\leq 150 \text{ }^\circ\text{C}$ (bake-out max. 24h)
– Actuator	$\leq 100 \text{ }^\circ\text{C}$

Created by: BISS	Release date: 13.10.2017	1/2
Modified by:	Release date:	<b>913286EA</b>



VAT Vakuumventile AG  
CH-9469 Haag, Schweiz

## Product data sheet

**HV gate valve, Series 091, DN 50 (2")**

**Ordering No. 09134-CE01**

Heating and cooling rate

50 °C h<sup>-1</sup>

### Material

- Valve body
- Bonnet
- Gate
- Parts (in contact with media)
- Bellows

AISI 304 (1.4301)  
EN AW-5083 (3.3547)  
AISI 304 (1.4301), (1.4308)  
A2 Ni-Teflon coated, PEEK  
AISI 633, (AM350)

### Seal

- Bonnet
- Gate
- Actuator

FKM (Viton<sup>®</sup>)  
FKM (Viton<sup>®</sup>)  
FKM (Viton<sup>®</sup>)

Mounting position

any

Weight

approx. 2.9 kg / 6.4 lbs

Created by: BISS	Release date: 13.10.2017	2/2
Modified by:	Release date:	<b>913286EA</b>